


Plasticizing units Standard or with individual options

Plasticizings are completely assembled and tested before delivery. The configuration of the components is based on the installed version. Designed as a standard or as an individual unit, which includes all options for a special or new application. The completed plasticizing provides as a Plug & Play solution a quick and easy installation.

Completed plasticizings are available for:

- All machine series
- Diameters from 15 to 265 mm
- Unit sizes: SP 55 to SP 101000

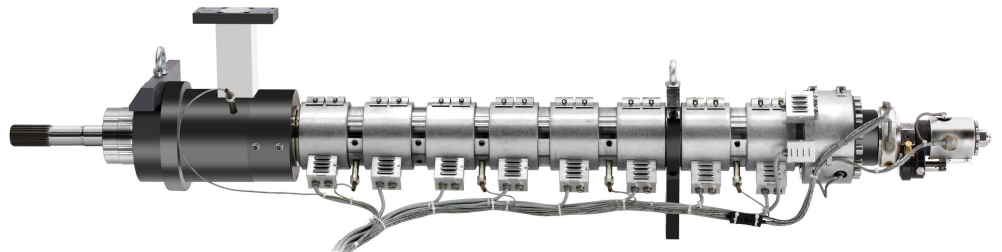

E.g.: SP 1000 CX unit with shut off nozzle

Your advantages at a glance:

- Completed and assembled unit
- Final testing
- Plug & Play solution for quick changes
- Modular concept including full range of options
- Individual configurations

Options:


- ZE 23.03 Increased abrasion and corrosion protection, e.g. glass fiber over 25%
- ZE 23.20 Non-stick coating for processing transparent Polycarbonate
- ZE 25.01 High temperature (-450°C) for SP 180 - 4300
- ZE 25.50 EcoPac insulation for heater bands

Individual options:

- Shut- off nozzle or valve systems
- Adaption units for reduced shot weights



Test center after assembling

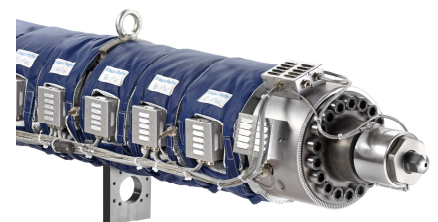

E.g.: ZE 25.50 Insulation